

AE POWERPLUS MODULE

AE P6-36 Series 150W-165W



POWER RANGE

Plus-Sorting 0 to + 4,99Wp



PID RESISTANT

Potential Induced Degradation Free



SALT CORROSION RESISTANT

Certified for Salt Rich Environment



SAND RESISTANT

Certified for Sand Rich Environment



AMMONIA RESISTANT

Certified for Ammonia Rich Atmosphere



HIGHLY STABLE AND TOUGH

Maximum Mechanical Load 5400 Pa



GERMAN QUALITY

AE Solar photovoltaic modules are manufactured using high-quality materials, automated machine, German Technology and Standards



PLUS-SORTING

Higher yield due to plus-sorting of 0 to +4.99 Wp guarantees the high system efficiency and yield stability



PERFORMANCE GUARANTEE


AE Solar assures high investment, security and warranty claims by providing linear performance guarantee of 30 years and 12 years of product warranty



CERTIFICATES

Lining with International Standards, AE Solar Photovoltaic modules are tested and certified under extreme stress and it can bear harsh environmental influences

OUR PERFORMANCE GUARANTEE

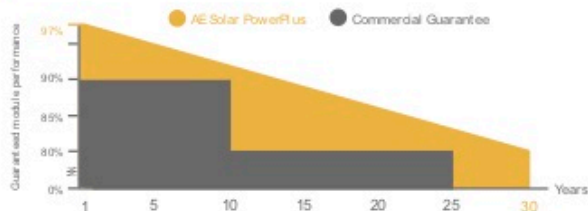

IEC 61215
IEC 61730
PERIODICAL
INCEPTION



IEC 61215
IEC 61730
PERIODICAL
INCEPTION



PID RESISTANT
SALT MIST RESISTANT
SAND RESISTANT
CORROSIVE GAS (NH₃)



Castellano: Jesus Torres
Tel. +49 157 8387 4754
Correo: j.torres@ae-solar.com
Web: www.ae-solar.com

TECHNICAL DATA

AE P6-36 Series 150W-165W

ELECTRICAL DATA		AE150P6-36	AE155P6-36	AE160P6-36	AE165P6-36
Nominal power	P _m (W _p)	150	155	160	165
Open circuit voltage	V _{oc} (V)	22.48	22.69	22.90	23.10
Short-circuit current	I _{sc} (A)	9.22	9.27	9.31	9.35
Voltage at max power	V _{mp} (V)	17.49	17.90	18.32	18.74
Current at max power	I _{mp} (A)	8.58	8.66	8.73	8.80
Filling Factor	(%)	72.37	73.69	75.05	76.39
Module Efficiency	(%)	15.13	15.63	16.14	16.64
System Voltage	(V)				1000
Temp. coefficient V _{oc}	(%/ °C)				-0.36
Temp. coefficient I _{sc}	(%/ °C)				0.06
Temp. coefficient P _m	(%/ °C)				-0.36
Operating temp.	(°C)				-40 to +85
NOCT	(°C)				45±2

The electrical data apply to standard test conditions (STC): Irradiance of 1000 W/m² with spectrum AM 1.5 and a cell temperature of 25°C.


TECHNICAL DATA

Junction box	2 bypass diodes, IP 67
Wire cross section (∅, mm ²)	4.0
Cable length (mm)	900
Connector type	MC 4 / MC 4 compatible
Dimensions (L x W x H, mm)	1480 x 670 x 35
Weight (kg)	10.8
Specification (mm)	Poly 156 / 4 x 9
Hail resistance	Max. ∅ 25 mm, at 23 m/s
Wind load	2400Pa / 244kg / m ²
Mechanical load	5400Pa / 550kg / m ²

PACKAGING INFORMATION

Packing configuration	90pcs / pallet
Loading Capacity	1350pcs / 40HQ
Size / pallet (mm)	1530 x 1135 x 2430
Weight	1098kg / pallet

SCALE

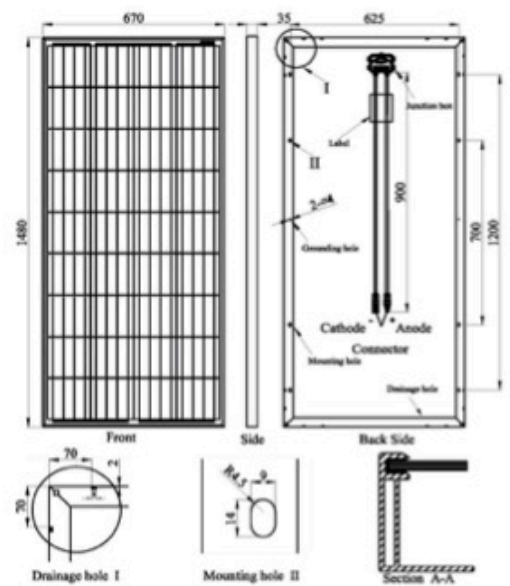

AE SOLAR
Messerschmittring 54
86343 Königsbrunn
Germany

Castellano: Jesus Torres
Tel. +49 157 8387 4754
Correo: j.torres@ae-solar.com
Web: www.ae-solar.com